Symmetry, Integrability and Geometry: Methods and Applications SIGMA * (201*), ***, 15 pages

arXiv:1302.0637v1 [nlin.SI] 4 Feb 2013

Two-dimensional Toda-Heisenberg lattice

V.E. Vekslerchik

Institute for Radiophysics and Electronics of NAS of Ukraine,
12, Proskura st., Kharkov, 61085, Ukraine
E-mail: *vekslerchik@yahoo.com*

Received ???, in final form ????; Published online ????
doi:10.3842/SIGMA.201*.***

Abstract. We consider a nonlinear model that is a combination of the anisotropic two-dimensional classical Heisenberg and Toda-like lattices. In the framework of the Hirota direct approach, we present the bilinear equations describing this model and derive its N-soliton solutions.

Key words: classical Heisenberg model; Toda-like lattices; Hirota direct method; solitons

2010 Mathematics Subject Classification: 39A14; 82D40; 35C08; 11C20

1 Introduction.

In this paper we consider the two-dimensional lattice that can be viewed as a generalization of the anisotropic two-dimensional classical Heisenberg model [1, 2],

$$\mathcal{E}_{\text{Heis}} = \sum_{\boldsymbol{r}\in\Lambda} \sum_{i=1,2} J_i \left(\boldsymbol{\phi}_{\boldsymbol{r}}, \boldsymbol{\phi}_{\boldsymbol{r}+\boldsymbol{\delta}_i} \right). \tag{1.1}$$

where $\boldsymbol{\phi}_{\boldsymbol{r}}$ is a three-dimensional unit vector,

$$\left(\boldsymbol{\phi}_{\boldsymbol{r}}, \boldsymbol{\phi}_{\boldsymbol{r}} \right) = 1 \tag{1.2}$$

(with brackets standing for the standard scalar product), $J_{1,2}$ are the constants characterizing the interaction between near-neighbour sites (exchange constants) and Λ is a two-dimensional lattice formed by two vectors $\boldsymbol{\delta}_1$ and $\boldsymbol{\delta}_2$:

$$\Lambda = \left\{ m_1 \boldsymbol{\delta}_1 + m_2 \boldsymbol{\delta}_2 \right\}_{m_1, m_2 = 0, \pm1, \pm2, \ldots} \tag{1.3}$$

The generalization that we are going to study consists in replacing the *constants* J_i with some functions of new variables. In more details, we associate with each site, in addition to the vector $\boldsymbol{\phi}_{\boldsymbol{r}}$, a new variable $u_{\boldsymbol{r}}$ and modify the exchange constants as

$$J_i \to J_i \exp\left\{ u_{\boldsymbol{r}} - u_{\boldsymbol{r}+\boldsymbol{\delta}_i} \right\}. \tag{1.4}$$

An elementary example that leads to the above modification of the exchange interaction is to permit the spins to oscillate in the direction perpendicular to the plane and to state that the interaction coefficients J depend on the distance (in the three-dimensional space) between the spins: $\mathcal{E}_{ab} = J\left(\left| \boldsymbol{R}_a - \boldsymbol{R}_b \right| \right) \left(\boldsymbol{\phi}_{\boldsymbol{r}_a}, \boldsymbol{\phi}_{\boldsymbol{r}_b} \right)$ where $\boldsymbol{R}_a = \boldsymbol{r}_a + u_{\boldsymbol{r}_a} \boldsymbol{\nu}$, with $\boldsymbol{\nu} \perp \boldsymbol{\delta}_{1,2}$. In this case the interaction between the nearest neighbours depends on $|\boldsymbol{\delta}_i|$ and $|u_{\boldsymbol{r}} - u_{\boldsymbol{r}+\boldsymbol{\delta}_i}|$, that can be modeled by (1.4). Of course, the dependence given by (1.4) is far from being realistic, however this toy model can give some insight into effects caused by such kind on nonlinearities, and especially into the possibility of appearing of specific structures like solitons that are discussed in this paper.

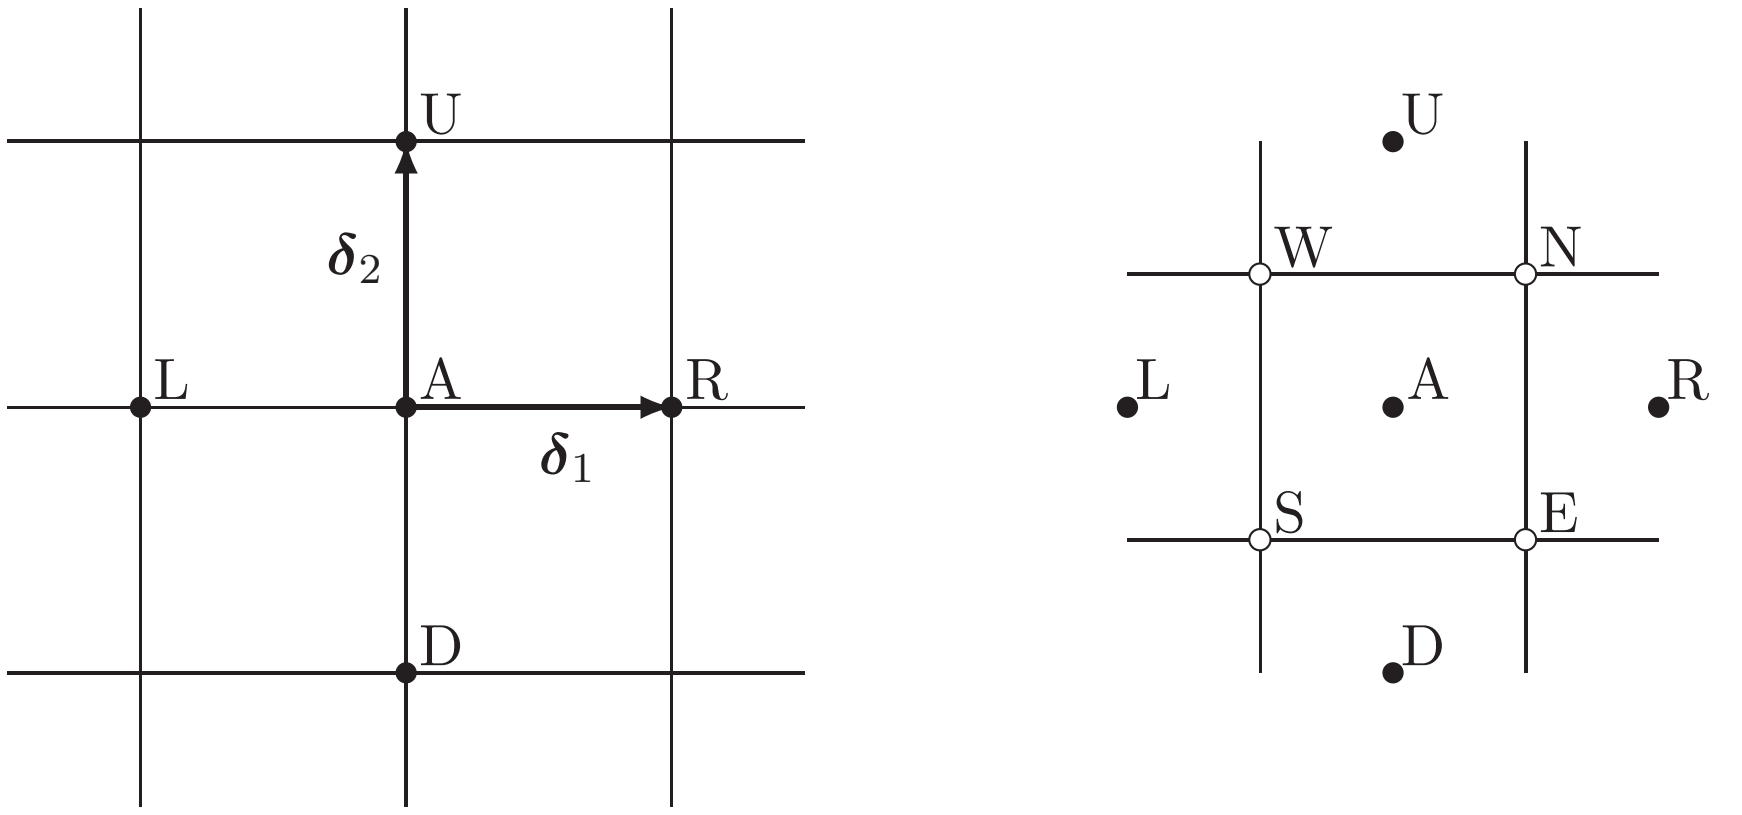

Figure 1. Direct and dual lattices, nearest-neighbour notation.

To summarize, our model is described by the energy functional

$$\mathcal{E} = \sum_{\boldsymbol{r}\in\Lambda} \sum_{i=1,2} J_i \exp\left\{u_{\boldsymbol{r}} - u_{\boldsymbol{r}+\boldsymbol{\delta}_i}\right\} \left(\boldsymbol{\phi}_{\boldsymbol{r}}, \boldsymbol{\phi}_{\boldsymbol{r}+\boldsymbol{\delta}_i}\right). \tag{1.5}$$

It is easy to see that neglecting the $\boldsymbol{\phi}_{\boldsymbol{r}}$-part, or imposing the restrictions $\left(\boldsymbol{\phi}_{\boldsymbol{r}}, \boldsymbol{\phi}_{\boldsymbol{r}+\boldsymbol{\delta}_i}\right) = c_i$ for all $\boldsymbol{r}$ and redefining the constants J_i, one arrives at the one of the Hirota's versions of the discrete 2D Toda lattice [3, 4]:

$$\mathcal{E}_{\mathrm{Toda}} = \sum_{\boldsymbol{r}\in\Lambda} \sum_{i=1,2} J_i \exp\left\{u_{\boldsymbol{r}} - u_{\boldsymbol{r}+\boldsymbol{\delta}_i}\right\} \tag{1.6}$$

whose field equations $\delta\mathcal{E}_{\mathrm{Toda}}/\delta u_{\boldsymbol{r}} = 0$ are known to be integrable (see, e.g., [5]). Thus, we call model (1.5), which is the subject of this paper, the two-dimensional Toda-Heisenberg lattice (2DTHL).

To make the following formulae more readable we introduce the alternative notation: instead of the vector index we will use a letter one,

$$\boldsymbol{\phi}_{\boldsymbol{r}}, u_{\boldsymbol{r}} \to \boldsymbol{\phi}_{A}, u_{A} \tag{1.7}$$

and denote the nearest neighbours of the point A as indicated in figure 1 (R, L, U and D stand for 'right', 'left', 'up', 'down'). The energy of the model can be rewritten as

$$\mathcal{E} = \frac{1}{2} \sum_{A} \mathcal{E}_{A} \tag{1.8}$$

where

$$\mathcal{E}_{A} = \sum_{B} J_{B} \, \exp\left\{\varepsilon_{B}\left(u_{A} - u_{B}\right)\right\} \left(\boldsymbol{\phi}_{A}, \boldsymbol{\phi}_{B}\right) \tag{1.9}$$

and the summation index runs over the nearest neighbours,

$$\sum_{B} ... = \sum_{B=R,U,L,D} ... \tag{1.10}$$

The constants J_B are nothing but $J_{1,2}$,

$$J_{R} = J_{L} = J_{1}, \qquad J_{U} = J_{D} = J_{2} \tag{1.11}$$

B	B'	B''	J_B	ε_B	ξ_B	μ_B
R	E	N	J_1	$+1$	ξ_1	μ
U	N	W	J_2	$+1$	ξ_2	$-1/\mu$
L	W	S	J_1	-1	ξ_1	μ
D	S	E	J_2	-1	ξ_2	$-1/\mu$

Table 1. Nearest-neighbour notation and parameters.

while ε_B take into account the signs of u_B in the exponential functions,

$$\varepsilon_R = -\varepsilon_L = \varepsilon_U = -\varepsilon_D = 1 \tag{1.12}$$

(see table 1). The central object of the presented study are the Euler-Lagrange equations corresponding to (1.8) with (1.9),

$$\frac{\delta \mathcal{E}_A}{\delta u_A} = \sum_B \varepsilon_B J_B \exp\{\varepsilon_B (u_A - u_B)\} (\boldsymbol{\phi}_A, \boldsymbol{\phi}_B) = 0, \tag{1.13}$$

$$\frac{\delta \mathcal{E}_A}{\delta \boldsymbol{\phi}_A} = \sum_B J_B \exp\{\varepsilon_B (u_A - u_B)\} [\boldsymbol{\phi}_A \times \boldsymbol{\phi}_B] = 0. \tag{1.14}$$

Here, we have calculated the derivative with respect to $\boldsymbol{\phi}_A$ bearing in mind the fact that $|\boldsymbol{\phi}_A| = 1$, which implies that the admissible variations should be orthogonal to $\boldsymbol{\phi}_A$, which in its turn leads to the 'definition' $\delta (\boldsymbol{\phi}_A, \boldsymbol{\psi}) / \delta \boldsymbol{\phi}_A = [\boldsymbol{\phi}_A, \boldsymbol{\psi}]$. The same result, (1.14), can be reproduced by means of the Lagrange multipliers.

2 Bilinearization of the 2DTHL.

One of the important moments of the direct approach is to introduce an appropriate representation of the unknown functions, $\boldsymbol{\phi}_A$ and u_A in our case, that leads to the bilinearization of the equations we want to solve. To this end we first pass from the vector variables $\boldsymbol{\phi}_A$ to the complex ones, q_A and r_A, defined by

$$\boldsymbol{\phi}_A = \frac{1}{\sqrt{p_A}} \begin{pmatrix} \operatorname{Re} q_A \\ \operatorname{Im} q_A \\ 1 \end{pmatrix} \tag{2.1}$$

where

$$p_A = 1 + |q_A|^2 \tag{2.2}$$

or $p_A = 1 - q_A r_A$ with

$$r_A = -q_A^* \tag{2.3}$$

(the asterisk denotes the complex conjugation). In terms of q_A and r_A the scalar and vector products are given by

$$(\boldsymbol{\phi}_A, \boldsymbol{\phi}_B) = \frac{1}{\sqrt{p_A p_B}} \left(1 + \operatorname{Re} q_A q_B^*\right), \tag{2.4}$$

$$[\boldsymbol{\phi}_A \times \boldsymbol{\phi}_B] = \frac{1}{\sqrt{p_A p_B}} \operatorname{Im} (q_A - q_B) \begin{pmatrix} 1 \\ -i \\ -q_A^* \end{pmatrix} \tag{2.5}$$

and one can present the left-hand sides of our main equations, (1.13) and (1.14), as

$$\mathcal{P}_{A} := \frac{\delta \mathcal{E}_{A}}{\delta u_{A}} = \sum_{B} \varepsilon_{B} J_{B} \frac{\exp\left\{\varepsilon_{B}\left(u_{A}-u_{B}\right)\right\}}{\sqrt{p_{A} p_{B}}} \left[1-\tfrac{1}{2}\left(q_{A} r_{B}+q_{B} r_{A}\right)\right] \tag{2.6}$$

and

$$\frac{\delta \mathcal{E}_{A}}{\delta \boldsymbol{\phi}_{A}} = \frac{1}{2i}\, \mathcal{Q}_{A} \begin{pmatrix} 1 \\ -i \\ r_{A} \end{pmatrix} + \frac{1}{2i}\, \mathcal{R}_{A} \begin{pmatrix} 1 \\ i \\ -q_{A} \end{pmatrix} \tag{2.7}$$

where

$$\mathcal{Q}_{A} \; := \; \sum_{B} J_{B} \frac{\exp\left\{\varepsilon_{B}\left(u_{A}-u_{B}\right)\right\}}{\sqrt{p_{A} p_{B}}} \left(q_{A}-q_{B}\right), \tag{2.8}$$

$$\mathcal{R}_{A} \; := \; \sum_{B} J_{B} \frac{\exp\left\{\varepsilon_{B}\left(u_{A}-u_{B}\right)\right\}}{\sqrt{p_{A} p_{B}}} \left(r_{A}-r_{B}\right). \tag{2.9}$$

Thus, the field equations of our model become

$$\mathcal{P}_{A} = \mathcal{Q}_{A} = \mathcal{R}_{A} = 0. \tag{2.10}$$

Considering the functions u_{A}, or $u_{\boldsymbol{r}}$, we first choose the ‘boundary conditions’,

$$u_{\boldsymbol{r}} \sim (\boldsymbol{k}, \boldsymbol{r}) \qquad \text{as} \qquad |\boldsymbol{r}| \to \infty \tag{2.11}$$

where $\boldsymbol{k}$ is a constant vector determining the asymptotics of solutions, and present them as

$$u_{\boldsymbol{r}} = \tilde{u}_{\boldsymbol{r}} + (\boldsymbol{k}, \boldsymbol{r}) \tag{2.12}$$

with bounded $\tilde{u}_{\boldsymbol{r}}$. This change of variables modifies the exponential functions that appear in (2.6), (2.8) and (2.9) as

$$\exp\left\{\varepsilon_{B}\left(u_{A}-u_{B}\right)\right\} = \xi_{B} \exp\left\{\varepsilon_{B}\left(\tilde{u}_{A}-\tilde{u}_{B}\right)\right\} \tag{2.13}$$

with

$$\begin{aligned} \xi_{R} &= \xi_{L} = \xi_{1} = \exp\left\{-\left(\boldsymbol{k}, \boldsymbol{\delta}_{1}\right)\right\}, \\ \xi_{U} &= \xi_{D} = \xi_{2} = \exp\left\{-\left(\boldsymbol{k}, \boldsymbol{\delta}_{2}\right)\right\} \end{aligned} \tag{2.14}$$

(see table 1).

Now we arrive at the key moment of bilinearization of our equations. It consists of introducing the dual lattice, as is shown in figure 1, whose nodes closest to the point A are denoted by the letters N, W, S and E (coming from ‘north’, ‘west’, ‘south’, and ‘east’) and the tau-functions τ, σ and ρ.

The real functions τ are defined by

$$p_{A} = \frac{\tau_{N} \tau_{S}}{\tau_{A}^{2}} \tag{2.15}$$

and

$$\exp\left(2\tilde{u}_{A}\right) = \frac{\tau_{S}}{\tau_{N}} \tag{2.16}$$

while the complex ones, σ and ρ are defined by

$$q_A = \frac{\sigma_A}{\tau_A}, \qquad r_A = \frac{\rho_A}{\tau_A} \tag{2.17}$$

and are related by

$$\tau_A^2 = \sigma_A \rho_A + \tau_N \tau_S \tag{2.18}$$

which is the consequence of the identity $p_A = 1 - q_A r_A$.

By simple algebra one can obtain the following representation of the exponential functions from (2.13):

$$\exp\left\{\varepsilon_B \left(\tilde{u}_A - \tilde{u}_B\right)\right\} = \sqrt{p_A p_B}\, \frac{\tau_A \tau_B}{\tau_{B'} \tau_{B''}} \tag{2.19}$$

where B' and B'' are the ends of the oriented edge of the dual lattice that crosses the edge (AB) of the direct one (see table 1).

Equation (2.19) leads to

$$\mathcal{P}_A = \sum_B \varepsilon_B J_B \xi_B \, \frac{\tau_A \tau_B - \frac{1}{2}\{\sigma, \rho\}_{AB}}{\tau_{B'} \tau_{B''}}, \tag{2.20}$$

$$\mathcal{Q}_A = \sum_B J_B \xi_B \, \frac{[\sigma, \tau]_{AB}}{\tau_{B'} \tau_{B''}}, \tag{2.21}$$

$$\mathcal{R}_A = \sum_B J_B \xi_B \, \frac{[\rho, \tau]_{AB}}{\tau_{B'} \tau_{B''}} \tag{2.22}$$

where we use the shorthands

$$\{x, y\}_{AB} = x_A y_B + x_B y_A, \qquad [x, y]_{AB} = x_A y_B - x_B y_A. \tag{2.23}$$

The final step in bilinearization of the field equations (2.10) is the following *ansatz*:

$$[\sigma, \tau]_{AB} = \mu_B \, [\sigma, \tau]_{B'B''} \tag{2.24}$$

$$[\rho, \tau]_{AB} = \mu_B \, [\rho, \tau]_{B'B''} \tag{2.25}$$

with constant μ_B. To make this ansatz consistent with the lattice translations one has to impose restrictions on these constants, namely

$$\begin{aligned} &\mu_L = \mu_R = \mu_1, \\ &\mu_D = \mu_U = \mu_2 \end{aligned} \tag{2.26}$$

that follow from the shifts along the direct lattice, and

$$\mu_1 \mu_2 = -1 \tag{2.27}$$

that follows from the shifts along the dual one. So, all the constants μ_B can be written in terms of one of them, $\mu = \mu_R$, as is shown in table 1.

Ansatz (2.24), (2.25) transforms the quantities (2.21), (2.22) into

$$\mathcal{Q}_A = \sum_B J_B \xi_B \mu_B \left(q_{B'} - q_{B''}\right), \tag{2.28}$$

$$\mathcal{R}_A = \sum_B J_B \xi_B \mu_B \left(r_{B'} - r_{B''}\right) \tag{2.29}$$

and it is easy to see that to solve equations $\mathcal{Q}_A = \mathcal{R}_A = 0$ one has just to put

$$J_B \xi_B \mu_B = I_* = \text{constant}. \tag{2.30}$$

Indeed, this equation, which can be rewritten as

$$J_1 \xi_1 \mu^2 + J_2 \xi_2 = 0 \tag{2.31}$$

and which determines μ as a function of $J_{1,2}$ and $\xi_{1,2}$ (or, equivalently, as a function of $J_{1,2}$ and $\boldsymbol{k}$) leads to

$$\begin{array}{rcl} \mathcal{Q}_A & = & I_* \sum_B \left(q_{B'} - q_{B''} \right) = 0, \\ \mathcal{R}_A & = & I_* \sum_B \left(r_{B'} - r_{B''} \right) = 0 \end{array} \tag{2.32}$$

where the last identities follow from the cyclic character of B' and B'' (see table 1).

To solve the last field equation, $\mathcal{P}_A = 0$, one can use

$$1 - \tfrac{1}{2}\{q,r\}_{AB} = p_A + \tfrac{1}{2}\mu_B \frac{\tau_{B'}\tau_{B''}}{\tau_A \tau_B} \Big[\{q,r\}_{AB'} - \{q,r\}_{AB''} \Big] \tag{2.33}$$

and rewrite $\mathcal{P}_A$ as

$$\mathcal{P}_A = \mathcal{P}_A^{(1)} + \mathcal{P}_A^{(2)} \tag{2.34}$$

where

$$\mathcal{P}_A^{(1)} = \sum_B \varepsilon_B J_B \xi_B \, \frac{\tau_A \tau_B}{\tau_{B'}\tau_{B''}} \, p_A, \tag{2.35}$$

$$\mathcal{P}_A^{(2)} = \frac{1}{2} \sum_B \varepsilon_B J_B \xi_B \mu_B \Big[\{q,r\}_{AB'} - \{q,r\}_{AB''} \Big]. \tag{2.36}$$

Expressing $J_B \xi_B$ from (2.30) one can get

$$\mathcal{P}^{(1)} / I_* = \left(\mathbb{T}_E - 1 \right) \frac{1}{\tau_A \tau_W} \left(\mu \tau_U \tau_S + \mu^{-1} \tau_L \tau_N \right) \tag{2.37}$$

where $\mathbb{T}_E$ indicates the shift in the ‘east’ direction:

$$\mathbb{T}_E f_A = f_E, \quad \mathbb{T}_E f_W = f_A, \quad \mathbb{T}_E f_L = f_S, \quad \textit{etc.} \tag{2.38}$$

In a similar way, $\mathcal{P}_A^{(2)}$ can be presented as

$$\mathcal{P}^{(2)} / I_* = \left(\mathbb{T}_E - 1 \right) \{q,r\}_{AW} \tag{2.39}$$

which means that equation $\mathcal{P}_A = 0$ can be replaced with

$$\frac{1}{\tau_A \tau_W} \left(\{\sigma,\rho\}_{AW} + \mu \tau_U \tau_S + \mu^{-1} \tau_L \tau_N \right) = \lambda = \text{constant}. \tag{2.40}$$

The simplest way to meet the condition of boundedness of $\tilde{u}_{\boldsymbol{r}}$ is to choose

$$\lambda = \mu + \mu^{-1}. \tag{2.41}$$

Thus, we have proved the following

Proposition 2.1. *A wide range of solutions for the field equations (1.13) and (1.14) can be obtained from the* bilinear *system*

$$\left\{\begin{array}{lcl} 0 & = & \tau_A^2 - \tau_N\tau_S - \sigma_A\rho_A \\ 0 & = & [\sigma,\tau]_{AL} + \mu[\sigma,\tau]_{SW} \\ 0 & = & [\rho,\tau]_{AL} + \mu[\rho,\tau]_{SW} \\ 0 & = & \{\sigma,\rho\}_{AW} + \mu\tau_U\tau_S + \mu^{-1}\tau_L\tau_N - \left(\mu+\mu^{-1}\right)\tau_A\tau_W . \end{array}\right. \tag{2.42}$$

This system is the one we were looking for: a bilinear system providing solutions for the field equations (1.13) and (1.14). However, these equations, except the first one, are four- and five-term ones, which makes their solution rather cumbersome. It is possible to prove directly that solutions presented below (see section 4) satisfy (2.42). However we take another way and *split*, in the next section, this system in a set of standard Hirota-like three-term equations. Of course, such splitting narrows the class of solutions. Nevertheless, this class is rather rich and contains the soliton solutions that we want to obtain.

3 Reduction of (2.42) to Hirota-like equations.

To explain the idea behind the splitting we are going to do, it seems reasonable to pass from the vertex notation to one based on the shifts/translations $\mathbb{T}$,

$$f_A = f, \quad f_W = \mathbb{T}_W f, \quad f_S = \mathbb{T}_S f, \quad etc. \tag{3.1}$$

In this notation, the bilinear system (2.42) can be rewritten as

$$\left\{\begin{array}{lcl} 0 & = & \tau^2 - \rho\sigma - \left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_N\tau\right) \\ 0 & = & \tau\left(\mathbb{T}_L\sigma\right) - \sigma\left(\mathbb{T}_L\tau\right) + \mu\left[\left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_W\sigma\right) - \left(\mathbb{T}_S\sigma\right)\left(\mathbb{T}_W\tau\right)\right] \\ 0 & = & \tau\left(\mathbb{T}_L\rho\right) - \rho\left(\mathbb{T}_L\tau\right) + \mu\left[\left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_W\rho\right) - \left(\mathbb{T}_S\rho\right)\left(\mathbb{T}_W\tau\right)\right] \\ 0 & = & \sigma\left(\mathbb{T}_W\rho\right) + \rho\left(\mathbb{T}_W\sigma\right) - \left(\mu+\mu^{-1}\right)\tau\left(\mathbb{T}_W\tau\right) + \mu\left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_U\tau\right) + \mu^{-1}\left(\mathbb{T}_N\tau\right)\left(\mathbb{T}_L\tau\right) \end{array}\right. \tag{3.2}$$

Each point of both direct and dual lattices can be reached by a composition of *two* basic shits, say, $\mathbb{T}_S$ and $\mathbb{T}_W$,

$$\mathbb{T}_N = \mathbb{T}_S^{-1}, \quad \mathbb{T}_L = \mathbb{T}_S\mathbb{T}_W, \quad \mathbb{T}_U = \mathbb{T}_S^{-1}\mathbb{T}_W, \quad etc. \tag{3.3}$$

and hence all equations can be presented in terms of these two translations only. The trick that leads to the reduction to three-term equations is to use *three* shifts as a basic system. One of them is, say, $\mathbb{T}_S$ while two more shifts come from the *splitting* of $\mathbb{T}_L$,

$$\mathbb{T}_L = \mathbb{T}_X\mathbb{T}_Y \tag{3.4}$$

or, alternatively, $\mathbb{T}_S\mathbb{T}_W = \mathbb{T}_X\mathbb{T}_Y$. Application of this construction to our equations leads to

Proposition 3.1. *A wide range of solutions for the field equations (1.13) and (1.14) can be obtained from the bilinear system of Hirota-like equations*

$$0 = \tau^2 - \rho\sigma - \left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_N\tau\right) \tag{3.5}$$

$$0 = \tau\left(\mathbb{T}_X\tau\right) - \sigma\left(\mathbb{T}_X\rho\right) - \left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_{NX}\tau\right) \tag{3.6}$$

$$0 = \mu\left(\mathbb{T}_S\sigma\right)\left(\mathbb{T}_X\rho\right) - \left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_X\tau\right) + \tau\left(\mathbb{T}_{SX}\tau\right) \tag{3.7}$$

$$0 = \tau\left(\mathbb{T}_Y\tau\right) - \rho\left(\mathbb{T}_Y\sigma\right) - \left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_{NY}\tau\right) \tag{3.8}$$

$$0 = \mu\left(\mathbb{T}_S\rho\right)\left(\mathbb{T}_Y\sigma\right) - \left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_Y\tau\right) + \tau\left(\mathbb{T}_{SY}\tau\right) \tag{3.9}$$

One can find a proof of this statement in appendix A. Geometrically, this constructions can be interpreted as if we considered our plane as a part of three-dimensional lattice and presented our bilinear equations as a projection of more simple three-dimensional system.

4 Soliton solutions for (3.5)–(3.9).

In this section we derive the soliton solutions for the bilinear system (3.5)–(3.9). This will be done in two steps. First we solve it without taking into account the condition $r = -q^*$ and, secondly, find the restrictions that should be imposed on the parameters of the solutions to meet it.

It should be noted that equations (3.5)–(3.9) are nothing but the Ablowitz-Ladik system [6, 7, 8]. Thus, we use some of the results of papers [6, 7], namely the structure of the soliton solutions without developing the inverse scattering transform from scratch.

The main blocks for constructing the N-solitons are the matrices that satisfy the 'almost rank-one' conditions

$$\mathsf{LA} - \mathsf{AR} = |1\rangle\langle \mathsf{a}|, \qquad \mathsf{RB} - \mathsf{BL} = |1\rangle\langle \mathsf{b}|. \tag{4.1}$$

Here L and R are constant diagonal matrices, $|1\rangle$ is constant N-component column, $\langle \mathsf{a}|$ and $\langle \mathsf{b}|$ are N-component rows depending on the coordinates of the problem.

We look for solutions of the form, similar to the form of soliton solutions for the Ablowitz-Ladik model:

$$\tau = \det|\mathsf{1} - \mathsf{AB}| = \det|\mathsf{1} - \mathsf{BA}| \tag{4.2}$$

and

$$q = \langle \mathsf{a}|\mathsf{F}\mathsf{R}^{-1}|1\rangle, \qquad r = -\langle \mathsf{b}|\mathsf{L}^{-1}\mathsf{G}|1\rangle. \tag{4.3}$$

Here $\mathsf{1}$ is the $N \times N$ unit matrix,

$$\mathsf{F} = (\mathsf{1} - \mathsf{BA})^{-1}, \qquad \mathsf{G} = (\mathsf{1} - \mathsf{AB})^{-1} \tag{4.4}$$

and $\langle \mathsf{a}|\mathsf{M}|1\rangle$ is the standard row-matrix-column product: $\langle \mathsf{a}|\mathsf{M}|b\rangle = \sum_{jk} a_j M_{jk} b_k$. where a_j, M_{jk} and b_k are components of a row $\langle \mathsf{a}|$, a matrix M and a column $|b\rangle$.

The second part of the 'solitonic ansatz' is that the action of the shifts $\mathbb{T}_{S,X,Y,\dots}$ can be implemented as the right multiplication by diagonal constant matrices. The structure of these matrices, that are rational functions of L and R, can be obtained, again, from [6, 7]. The resulting formulae can be written as follows:

Proposition 4.1. *Soliton solutions for (3.5)–(3.9) are given by*

$$\tau = \det|\mathsf{1} - \mathsf{AB}| = \det|\mathsf{1} - \mathsf{BA}| \tag{4.5}$$

and

$$\sigma = \tau\langle \mathsf{a}|\mathsf{F}\mathsf{R}^{-1}|1\rangle, \qquad \rho = -\tau\langle \mathsf{b}|\mathsf{L}^{-1}\mathsf{G}|1\rangle \tag{4.6}$$

with the following actions of the $\mathbb{T}$*-shifts:*

$$\begin{array}{rclrcl}
\mathbb{T}_S\mathsf{A} & = & \mathsf{AR} & \qquad \mathbb{T}_S\mathsf{B} & = & \mathsf{B}\mathsf{L}^{-1} \\
\mathbb{T}_X\mathsf{A} & = & \mathsf{A}\,(1 + \mu\mathsf{R}) & \qquad \mathbb{T}_X\mathsf{B} & = & \mathsf{B}\,(1 + \mu\mathsf{L})^{-1} \\
\mathbb{T}_Y\mathsf{A} & = & \mathsf{A}\left(1 + \mu\mathsf{R}^{-1}\right)^{-1} & \qquad \mathbb{T}_Y\mathsf{B} & = & \mathsf{B}\left(1 + \mu\mathsf{L}^{-1}\right).
\end{array} \tag{4.7}$$

Equations (4.7) lead to similar ones for the rows $\langle \mathsf{a}|$ and $\langle \mathsf{b}|$:

$$\begin{array}{rclrcl}
\mathbb{T}_S\langle \mathsf{a}| & = & \langle \mathsf{a}|\mathsf{R} & \qquad \mathbb{T}_S\langle \mathsf{b}| & = & \langle \mathsf{b}|\mathsf{L}^{-1} \\
\mathbb{T}_X\langle \mathsf{a}| & = & \langle \mathsf{a}|\,(1 + \mu\mathsf{R}) & \qquad \mathbb{T}_X\langle \mathsf{b}| & = & \langle \mathsf{b}|\,(1 + \mu\mathsf{L})^{-1} \\
\mathbb{T}_Y\langle \mathsf{a}| & = & \langle \mathsf{a}|\left(1 + \mu\mathsf{R}^{-1}\right)^{-1} & \qquad \mathbb{T}_Y\langle \mathsf{b}| & = & \langle \mathsf{b}|\left(1 + \mu\mathsf{L}^{-1}\right).
\end{array} \tag{4.8}$$

This proposition is proved in appendix B.

After having derived the ‘general’ soliton solutions for (3.5)–(3.9), we have to ensure the ‘physical’ involution $r = -q^*$, or

$$\tau^* = \tau, \qquad \rho = -\sigma^* \tag{4.9}$$

bearing in mind that

$$\mu^* = \epsilon\mu, \qquad \epsilon = \pm 1 \tag{4.10}$$

which follows from the fact that $\mu^2 = -J_2\xi_2/J_1\xi_1$ is real, but possibly negative, number (see (2.31)).

Omitting rather straightforward calculations, we present here the following results: the relationships between the matrices A and B, and hence between the rows $\langle \mathsf{a}|$ and $\langle \mathsf{b}|$, that ensure (4.9) are

$$\mathsf{L}^* = \epsilon\mathsf{R}^{-1}, \qquad \mathsf{R}^* = \epsilon\mathsf{L}^{-1} \tag{4.11}$$

together with

$$\mathsf{A}^* = -\mathsf{RBL}^{-1}, \qquad \mathsf{B}^* = -\mathsf{LAR}^{-1} \tag{4.12}$$

and

$$\langle \mathsf{a}^*| = \epsilon\langle \mathsf{b}|\mathsf{L}^{-2}. \tag{4.13}$$

Restrictions (4.12)–(4.13) can be resolved by introducing, instead of A and B, one matrix C,

$$\mathsf{A} = \mathsf{CR}, \qquad \mathsf{B} = -\epsilon\mathsf{R}^{-1}\mathsf{C}^*, \tag{4.14}$$

and one row $\langle \mathsf{c}|$ instead of $\langle \mathsf{a}|$ and $\langle \mathsf{b}|$,

$$\langle \mathsf{a}| = \langle \mathsf{c}|\mathsf{R}, \qquad \langle \mathsf{b}| = \langle \mathsf{c}^*|\mathsf{L}. \tag{4.15}$$

Definitions (4.14) and (4.15) enable to present F and G as

$$\mathsf{F} = \mathsf{R}^{-1}\mathsf{HR}, \qquad \mathsf{G} = \mathsf{H}^* \tag{4.16}$$

where

$$\mathsf{H} = (1 + \epsilon\mathsf{C}^*\mathsf{C})^{-1} \tag{4.17}$$

and to rewrite (4.2) and (4.3) as

$$\tau = \det|1 + \epsilon\mathsf{C}^*\mathsf{C}| \tag{4.18}$$

and

$$q = \langle \mathsf{c}|\mathsf{H}|1\rangle, \qquad r = -\langle \mathsf{c}^*|\mathsf{H}^*|1\rangle \tag{4.19}$$

which clearly demonstrates the fulfilment of (4.9).

5 Solitons of the 2DTHL.

Now we have all necessary to present the N-soliton solutions for equations (1.13), (1.14), *i.e.* to write down the expressions describing the solitons of the 2DTHL.

First we have to return from the next-neighbour notation to the 'absolute' one noting that for any lattice vector,

$$\boldsymbol{r} = m_1 \boldsymbol{\delta}_1 + m_2 \boldsymbol{\delta}_2, \tag{5.1}$$

and any function $f_{\boldsymbol{r}}$

$$f_{\boldsymbol{r}} = \mathbb{T}_R^{m_1} \mathbb{T}_U^{m_2} f \tag{5.2}$$

where f is the value of the function at some fixed point. Recalling that $\mathbb{T}_L = \mathbb{T}_X \mathbb{T}_Y$ and that

$$\mathbb{T}_R = \mathbb{T}_L^{-1}, \qquad \mathbb{T}_U = \mathbb{T}_L \mathbb{T}_S^{-2} \tag{5.3}$$

one can introduce the matrices $\mathsf{C}_{\boldsymbol{r}}$ and the rows $\langle \mathsf{c}_{\boldsymbol{r}} |$ by

$$\mathsf{C}_{\boldsymbol{r}} = \mathsf{C}\, \mathsf{M}_1^{m_1} \mathsf{M}_2^{m_2}, \qquad \langle \mathsf{c}_{\boldsymbol{r}} | = \langle \mathsf{c} |\, \mathsf{M}_1^{m_1} \mathsf{M}_2^{m_2} \tag{5.4}$$

where, as follows from (4.7),

$$\mathsf{M}_1 = \left(1 + \mu \mathsf{R}^{-1}\right) \left(1 + \mu \mathsf{R}\right)^{-1}, \tag{5.5}$$

$$\mathsf{M}_2 = \left(\mathsf{R}^{-1} + \mu 1\right) \left(\mathsf{R} + \mu 1\right)^{-1} \tag{5.6}$$

with *constant* C and $\langle \mathsf{c} |$ related by

$$\mathsf{LC} - \mathsf{CR} = |1\rangle\langle \mathsf{c}| \tag{5.7}$$

or

$$\left(\mathsf{C}\right)_{jk} = \frac{c_k}{L_j - R_k} = \frac{\epsilon R_j^* c_k}{1 - \epsilon R_j^* R_k}. \tag{5.8}$$

The parameter μ depends on vector $\boldsymbol{k}$ that defines the asymptotics of solutions (see (2.31) and (2.11)),

$$\mu = \mu(\boldsymbol{k}) = \sqrt{-\frac{J_2}{J_1}} \exp\left[\tfrac{1}{2}\left(\boldsymbol{k}, \boldsymbol{\delta}_1 - \boldsymbol{\delta}_2\right)\right] \tag{5.9}$$

while the constant ϵ is given by

$$\epsilon = -\operatorname{sign} J_1 J_2. \tag{5.10}$$

In this notation, the main formulae of the previous section become

$$q_{\boldsymbol{r}} = \langle \mathsf{c}_{\boldsymbol{r}} | \mathsf{H}_{\boldsymbol{r}} | 1 \rangle \tag{5.11}$$

where

$$\mathsf{H}_{\boldsymbol{r}} = \left(1 + \epsilon \mathsf{C}_{\boldsymbol{r}}^* \mathsf{C}_{\boldsymbol{r}}\right)^{-1} \tag{5.12}$$

and

$$\tau_{\boldsymbol{r}} = \det\left|1 + \epsilon \mathsf{C}_{\boldsymbol{r}}^* \mathsf{C}_{\boldsymbol{r}}\right|. \tag{5.13}$$

Finally, one can present the soliton solutions of the model considered in this paper as follows: the vectors $\phi_{\boldsymbol r}$ are given by

$$\boldsymbol{\phi}_{\boldsymbol r} = \begin{pmatrix} \sin\theta_{\boldsymbol r}\cos\varphi_{\boldsymbol r} \\ \sin\theta_{\boldsymbol r}\sin\varphi_{\boldsymbol r} \\ \cos\theta_{\boldsymbol r} \end{pmatrix} \tag{5.14}$$

with

$$\theta_{\boldsymbol r} = \arcsin\frac{|q_{\boldsymbol r}|}{1+|q_{\boldsymbol r}|^2}, \qquad \varphi_{\boldsymbol r} = \arg q_{\boldsymbol r} \tag{5.15}$$

where $q_{\boldsymbol r}$ are defined by (5.11) while

$$u_{\boldsymbol r} = (\boldsymbol k, \boldsymbol r) + \frac{1}{2}\ln\frac{\tau_{\boldsymbol r}^{+}}{\tau_{\boldsymbol r}^{-}} \tag{5.16}$$

with

$$\tau_{\boldsymbol r}^{\pm} = \mathbb{T}_S^{\pm1}\tau_{\boldsymbol r} = \det\left|1 + \epsilon\mathsf{C}_{\boldsymbol r}^{*}\mathsf{L}^{\mp1}\mathsf{C}_{\boldsymbol r}\mathsf{R}^{\pm1}\right|. \tag{5.17}$$

6 Conclusion.

In this paper, we have presented a nonlinear 2D lattice and have obtained its N-soliton solutions. Existence of such solutions means that the 2DTHL passes the 'three-soliton' test [10, 11, 12, 13, 14, 15] (see also [16, 17] for its application to discrete systems) which is a strong evidence of the integrability of the problem. However, the situations with the 2DTHL can be more complicated: there is a possibility that equations from Propositions 2.1 and 3.1 belong to the family of the so-called 'conditionally integrable' systems introduced by Dorizzi *et al* [18]. In any case, the questions related to the integrability of the 2DTHL, its zero-curvature representation and conserved quantities surely deserve further studies. Another possible continuation of this work is related to prospective applications to the theory of magnetic system. Traditionally, the soliton solutions are most representative ones for any integrable system. However, from the viewpoint of the theory of magnetism, it would be interesting to find other families of solutions, except the *non-topological* solitons presented in this paper, that correspond to more typical magnetic structures as, e.g., domain walls and finite magnetic domains.

References

[1] Brown H.A. and Luttinger J.M., Ferromagnetic and antiferromagnetic Curie temperatures, *Phys. Rev.*, 1955, **100**, 685–692.

[2] Mattis D.C., The Theory of Magnetism I. Statics and Dynamics, *Springer Series in Solid-State Sciences*, Vol. 17, Springer-Verlag, Berlin, New York, 1981, 300 p.

[3] Hirota R., Nonlinear partial difference equations. I. A difference analogue of the Korteweg-de Vries equation. *JPSJ*, 1977, **43**, 1424–1433.

[4] Hirota R., Nonlinear partial difference equations. II. Discrete-time Toda equation. *JPSJ*, 1977, **43**, 2074–2078.

[5] Papageorgiou V., Grammaticos B., Ramani A., Orthogonal polynomial approach to discrete Lax pairs for initial boundary-value problems of the QD algorithm. *Lett. Math. Phys.*, 1995, **34**, 91–101.

[6] Ablowitz M.J. and Ladik J.F., Nonlinear differential-difference equations, *J. Math. Phys.*, 1975, **16**, 598–603.

[7] Ablowitz M.J. and Ladik J.F., Nonlinear differential-difference equations and Fourier analysis. *J. Math. Phys.*, 1976, **17**, 1011–1018.

[8] Vekslerchik V.E., Functional representation of the Ablowitz-Ladik hierarchy. II, *J. Nonlin. Math. Phys.*, 2002, **9**, 157–180.

[9] Nijhoff F., Atkinson J., Hietarinta J., Soliton solutions for ABS lattice equations: I. Cauchy matrix approach. *J. Phys. A*, 2009, **42**, 404005.

[10] Hirota R., The Direct Method in Soliton Theory, *Cambridge Tracts in Mathematics*, Vol. 155, Cambridge University Press, Cambridge, New York, Melbourne, Madrid, Cape Town, Singapore, Sao Paulo, 2004, 200 p.

[11] Newell A.C., Yunbo Z., The Hirota conditions. *J. Math. Phys.*, 1986, **27**, 2016–2021.

[12] Hietarinta J., A search for bilinear equations passing Hirota's three-soliton condition. I. KdV-type bilinear equations. *J. Math. Phys.*, 1987, **28**, 1732–.

[13] Hietarinta J., A search for bilinear equations passing Hirota's three-soliton condition. II. mKdV-type bilinear equations. *J. Math. Phys.*, 1987, **28**, 2094–.

[14] Hietarinta J., A search for bilinear equations passing Hirota's three-soliton condition. III. Sine-Gordon-type bilinear equations. *J. Math. Phys.*, 1987, **28**, 2586–.

[15] Hietarinta J., A search for bilinear equations passing Hirota's three-soliton condition. IV. Complex bilinear equations. *J. Math. Phys.*, 1988, **29**, 628–635.

[16] Hietarinta J. and Zhang D.J., Hirotas method and the search for integrable partial difference equations. 1. Equations on a 3×3 stencil. `arxiv:nlin.SI/1210.4708`.

[17] Hietarinta J. and Zhang D.J., Hirota's method and the search for integrable partial difference equations. 2. Equations on a 2×N stencil. In Reports of RIAM Symposium, No.22AO-S8, 2011, 30–36.

[18] Dorizzi B., Grammaticos B., Ramani A., Winternitz P., Are all the equations of the Kadomtsev-Petviashvili hierarchy integrable? *J. Math. Phys.*, 1986, **27**, 2848–2852.

A Proof of Proposition 3.1.

The proof of Proposition 3.1 is straightforward and consists in presenting the right-hand sides of the equations from Proposition 2.1 as combinations of the right-hand sides of the equations from Proposition 3.1. To this end, consider the following definitions:

$$\mathfrak{a} = \tau^2 - \rho\sigma - (\mathbb{T}_S\tau)(\mathbb{T}_N\tau), \tag{A.1}$$

$$\mathfrak{b}^{(1)} = \tau(\mathbb{T}_X\tau) - \sigma(\mathbb{T}_X\rho) - (\mathbb{T}_S\tau)(\mathbb{T}_{NX}\tau), \tag{A.2}$$

$$\mathfrak{b}^{(2)} = \mu(\mathbb{T}_S\sigma)(\mathbb{T}_X\rho) - (\mathbb{T}_S\tau)(\mathbb{T}_X\tau) + \tau(\mathbb{T}_{SX}\tau), \tag{A.3}$$

$$\mathfrak{c}^{(1)} = \tau(\mathbb{T}_Y\tau) - \rho(\mathbb{T}_Y\sigma) - (\mathbb{T}_S\tau)(\mathbb{T}_{NY}\tau), \tag{A.4}$$

$$\mathfrak{c}^{(2)} = \mu(\mathbb{T}_S\rho)(\mathbb{T}_Y\sigma) - (\mathbb{T}_S\tau)(\mathbb{T}_Y\tau) + \tau(\mathbb{T}_{SY}\tau) \tag{A.5}$$

(which are shortcuts for the right-hand sides of (3.5)-(3.9)). Our aim is to prove that vanishing of $\mathfrak{a}$, $\mathfrak{b}^{(1,2)}$ and $\mathfrak{c}^{(1,2)}$ implies vanishing of

$$\begin{aligned}
\mathfrak{Q} &= \tau\left(\mathbb{T}_L\sigma\right) - \sigma\left(\mathbb{T}_L\tau\right) + \mu\left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_W\sigma\right) - \mu\left(\mathbb{T}_S\sigma\right)\left(\mathbb{T}_W\tau\right), && \text{(A.6)}\\
\mathfrak{R} &= \tau\left(\mathbb{T}_L\rho\right) - \rho\left(\mathbb{T}_L\tau\right) + \mu\left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_W\rho\right) - \mu\left(\mathbb{T}_S\rho\right)\left(\mathbb{T}_W\tau\right), && \text{(A.7)}\\
\mathfrak{P} &= \sigma\left(\mathbb{T}_W\rho\right) + \rho\left(\mathbb{T}_W\sigma\right) - \left(\mu + \mu^{-1}\right)\tau\left(\mathbb{T}_W\tau\right) && \text{(A.8)}\\
&\quad + \mu\left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_U\tau\right) + \mu^{-1}\left(\mathbb{T}_N\tau\right)\left(\mathbb{T}_L\tau\right)
\end{aligned}$$

(the right-hand sides of equations (3.2)). The first part of the proof is simple: it can be shown that $\mathfrak{Q}$ and $\mathfrak{R}$ are linear combinations of $\mathfrak{b}^{(1,2)}$ and $\mathfrak{c}^{(1,2)}$. Indeed, one can check that

$$\begin{aligned}
\left(\mathbb{T}_X\rho\right)\mathfrak{Q} &= \left(\mathbb{T}_L\tau\right)\mathfrak{b}^{(1)} - \left(\mathbb{T}_W\tau\right)\mathfrak{b}^{(2)} - \tau\left(\mathbb{T}_X\mathfrak{c}^{(1)}\right) + \left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_{NX}\mathfrak{c}^{(2)}\right), && \text{(A.9)}\\
\left(\mathbb{T}_Y\sigma\right)\mathfrak{R} &= -\tau\left(\mathbb{T}_Y\mathfrak{b}^{(1)}\right) + \left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_{NY}\mathfrak{b}^{(2)}\right) + \left(\mathbb{T}_L\tau\right)\mathfrak{c}^{(1)} - \left(\mathbb{T}_W\tau\right)\mathfrak{c}^{(2)}. && \text{(A.10)}
\end{aligned}$$

Thus

$$\mathfrak{b}^{(1,2)} = \mathfrak{c}^{(1,2)} = 0 \qquad \Rightarrow \qquad \mathfrak{Q} = \mathfrak{R} = 0. \tag{A.11}$$

As to $\mathfrak{P}$, the calculations are slightly more complicated and can be performed in two steps. First, writing the system composed of (A.2) and shifted (A.5),

$$\left\{\begin{aligned}
\mathfrak{b}^{(1)} &= \tau\left(\mathbb{T}_X\tau\right) - \sigma\left(\mathbb{T}_X\rho\right) - \left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_{NX}\tau\right)\\
\mathbb{T}_{NX}\mathfrak{c}^{(2)} &= \mu\left(\mathbb{T}_W\sigma\right)\left(\mathbb{T}_X\rho\right) - \left(\mathbb{T}_W\tau\right)\left(\mathbb{T}_X\tau\right) + \left(\mathbb{T}_L\tau\right)\left(\mathbb{T}_{NX}\tau\right),
\end{aligned}\right. \tag{A.12}$$

and eliminating $\left(\mathbb{T}_X\rho\right)$ one arrives at

$$\sigma\left(\mathbb{T}_{NX}\mathfrak{c}^{(2)}\right) + \mu\left(\mathbb{T}_W\sigma\right)\mathfrak{b}^{(1)} = A\left(\mathbb{T}_X\tau\right) - B\left(\mathbb{T}_{NX}\tau\right) \tag{A.13}$$

where

$$\begin{aligned}
A &= \mu\tau\left(\mathbb{T}_W\sigma\right) - \sigma\left(\mathbb{T}_W\tau\right), && \text{(A.14)}\\
B &= \mu\left(\mathbb{T}_S\tau\right)\left(\mathbb{T}_W\sigma\right) - \sigma\left(\mathbb{T}_L\tau\right). && \text{(A.15)}
\end{aligned}$$

In a similar way, elimination of $\mathbb{T}_{NX}\rho$ from

$$\left\{\begin{aligned}
\mathbb{T}_N\mathfrak{b}^{(2)} &= \mu\sigma\left(\mathbb{T}_{NX}\rho\right) - \tau\left(\mathbb{T}_{NX}\tau\right) + \left(\mathbb{T}_N\tau\right)\left(\mathbb{T}_X\tau\right)\\
\mathbb{T}_{NX}\mathfrak{c}^{(1)} &= \left(\mathbb{T}_W\tau\right)\left(\mathbb{T}_{NX}\tau\right) - \left(\mathbb{T}_W\sigma\right)\left(\mathbb{T}_{NX}\rho\right) - \left(\mathbb{T}_U\tau\right)\left(\mathbb{T}_X\tau\right)
\end{aligned}\right. \tag{A.16}$$

leads to

$$\left(\mathbb{T}_W\sigma\right)\left(\mathbb{T}_N\mathfrak{b}^{(2)}\right) + \mu\sigma\left(\mathbb{T}_{NX}\mathfrak{c}^{(1)}\right) = -C\left(\mathbb{T}_X\tau\right) + D\left(\mathbb{T}_{NX}\tau\right) \tag{A.17}$$

with

$$\begin{aligned}
C &= \mu\sigma\left(\mathbb{T}_U\tau\right) - \left(\mathbb{T}_N\tau\right)\left(\mathbb{T}_W\sigma\right), && \text{(A.18)}\\
D &= \mu\sigma\left(\mathbb{T}_W\tau\right) - \tau\left(\mathbb{T}_W\sigma\right) && \text{(A.19)}
\end{aligned}$$

or, in the matrix form,

$$\begin{pmatrix} A & -B \\ -C & D \end{pmatrix}\begin{pmatrix} \mathbb{T}_X\tau \\ \mathbb{T}_{NX}\tau \end{pmatrix} = \begin{pmatrix} \mathfrak{d}^{(1)} \\ \mathfrak{d}^{(2)} \end{pmatrix} \tag{A.20}$$

where $\mathfrak{d}^{(1,2)}$ are linear combinations of shifted $\mathfrak{b}^{(1,2)}$ and $\mathfrak{c}^{(1,2)}$. On the other hand, one can straightforwardly verify the identity

$$\sigma\left(\mathbb{T}_{W}\sigma\right)\mathfrak{P}+\mu^{-1}(AD-BC)+\left(\mathbb{T}_{W}\sigma\right)^{2}\mathfrak{a}+\sigma^{2}\left(\mathbb{T}_{W}\mathfrak{a}\right)=0. \tag{A.21}$$

Equations (3.2) imply vanishing of the last two terms of the left-hand side of the last equation and of the vector $(\mathfrak{d}^{(1)},\mathfrak{d}^{(2)})^{T}$, which means that the determinant of the matrix that appears in the left-hand side of (A.20) is zero, $AD-BC=0$, since we assume $\tau\neq 0$ (and, hence, $\mathbb{T}_{X}\tau\neq 0$ and $\mathbb{T}_{NX}\tau\neq 0$). This, together with (A.21), leads to

$$\mathfrak{a}=\mathfrak{b}^{(1,2)}=\mathfrak{c}^{(1,2)}=0 \qquad \Rightarrow \qquad \mathfrak{P}=0 \tag{A.22}$$

which completes the proof of the fact that equations (3.5)-(3.9) imply (3.2) which, in its turn, completes the proof of Proposition 3.1.

B Verification of the solitonic ansatz.

To make the following formulae more readable we use here the 'node' notation not only for the nodes of lattices (direct and dual) but for the results of the auxiliary shifts $\mathbb{T}_{X,Y}$ as well:

$$f_{X}=\mathbb{T}_{X}f, \quad f_{Y}=\mathbb{T}_{Y}f, \quad f_{SX}=\mathbb{T}_{X}f_{S}=\mathbb{T}_{X}\mathbb{T}_{S}f, \quad etc. \tag{B.1}$$

First let us prove the fact that equations (4.3)–(4.8) imply (3.6). Applying (4.1) and the S-part of (4.7) to the product $\mathsf{B}_{S}\mathsf{A}_{S}$ one can get

$$\mathsf{BA}-\mathsf{B}_{S}\mathsf{A}_{S}=\mathsf{B}_{S}|1\rangle\langle\mathsf{a}| \tag{B.2}$$

which leads to

$$\mathsf{FF}_{S}^{-1}=1+\mathsf{FB}_{S}|1\rangle\langle\mathsf{a}| \tag{B.3}$$

and

$$\mathsf{F}_{S}\mathsf{F}^{-1}=1-\mathsf{F}_{S}\mathsf{B}_{S}|1\rangle\langle\mathsf{a}|. \tag{B.4}$$

Shifting this equation in the $\mathbb{T}_{N}\mathbb{T}_{X}$-direction one can obtain

$$\mathsf{KF}_{X}\mathsf{F}_{NX}^{-1}\mathsf{K}^{-1}=1-\mathsf{KF}_{X}\mathsf{B}_{X}|1\rangle\langle\mathsf{a}| \tag{B.5}$$

where

$$\mathsf{K}=\mathsf{R}^{-1}+\mu \tag{B.6}$$

(we have used the fact that $\langle\mathsf{a}_{NX}|\mathsf{K}^{-1}=\langle\mathsf{a}|$). Multiplying (B.3) and (B.5) one arrives at

$$\mathsf{FF}_{S}^{-1}\,\mathsf{KF}_{X}\mathsf{F}_{NX}^{-1}\mathsf{K}^{-1}=1+\mathsf{FU}|1\rangle\langle\mathsf{a}| \tag{B.7}$$

where

$$\begin{aligned}\mathsf{U} &= \mathsf{B}_{S}-\mathsf{F}_{S}^{-1}\mathsf{KF}_{X}\mathsf{B}_{X} &\text{(B.8)}\\ &= \mathsf{B}_{S}\left(1+\mathsf{A}_{S}\mathsf{KF}_{X}\mathsf{B}_{X}\right)-\mathsf{KF}_{X}\mathsf{B}_{X}. &\text{(B.9)}\end{aligned}$$

Noting that $\mathsf{A}_{S}\mathsf{K}=\mathsf{A}_{X}$ and applying the identities

$$\mathsf{FB}=\mathsf{BG}, \qquad 1+\mathsf{AFB}=\mathsf{G} \tag{B.10}$$

one can continue the calculations as follows:

$$\begin{aligned} \mathsf{U} &= \mathsf{B}_S \left(1 + \mathsf{A}_X \mathsf{F}_X \mathsf{B}_X\right) - \mathsf{K}\mathsf{F}_X \mathsf{B}_X && \text{(B.11)} \\ &= \left(\mathsf{B}_S - \mathsf{K}\mathsf{B}_X\right) \mathsf{G}_X && \text{(B.12)} \\ &= \mathsf{R}^{-1} |1\rangle\langle \mathsf{b}_{SX}| \mathsf{G}_X . && \text{(B.13)} \end{aligned}$$

After substitution of U in (B.7) and calculating the determinants of the both sides one arrives at

$$\frac{\tau_S \tau_{NX}}{\tau \tau_X} = 1 - q r_X \tag{B.14}$$

(here, the identities $\tau = 1/\det \mathsf{F}$ and $\det(1 + |\mathsf{u}\rangle\langle \mathsf{v}|) = 1 + \langle \mathsf{v}|\mathsf{u}\rangle$ have been used) which at the level of the tau-functions is

$$0 = \tau\tau_X - \sigma\rho_X - \tau_S \tau_{NX}. \tag{B.15}$$

Thus we have proved that our solutions satisfy equations (3.6).

Noting that the implementation of the shift $\mathbb{T}_X$ depends analytically on μ and $\mathbb{T}_X|_{\mu=0}$ is the unit operator, one obtains from the above calculations, by sending $\mu \to 0$, that our ansatz ensures (3.5) as well.

In a similar way, applying (4.1) to $\mathsf{B}_X \mathsf{A}_X$ one can obtain

$$\begin{aligned} \mathsf{F}_X \mathsf{F}^{-1} &= 1 - \mu \mathsf{F}_X \mathsf{B}_X |1\rangle\langle \mathsf{a}| && \text{(B.16)} \\ \mathsf{F}\mathsf{F}_X^{-1} &= 1 + \mu \mathsf{F}\mathsf{B}_X |1\rangle\langle \mathsf{a}| && \text{(B.17)} \end{aligned}$$

and then

$$\mathsf{F}_S \mathsf{F}_{SX}^{-1}\, \mathsf{R}^{-1} \mathsf{F}_X \mathsf{F}^{-1} \mathsf{R} = 1 + \mu \mathsf{F}_S \mathsf{V} |1\rangle\langle \mathsf{a}_S| \tag{B.18}$$

where

$$\begin{aligned} \mathsf{V} &= \mathsf{B}_{SX} - \mathsf{F}_{SX}^{-1} \mathsf{R}^{-1} \mathsf{F}_X \mathsf{B}_X && \text{(B.19)} \\ &= \mathsf{B}_{SX} \left(1 + \mathsf{A}_X \mathsf{F}_X \mathsf{B}_X\right) - \mathsf{R}^{-1} \mathsf{F}_X \mathsf{B}_X && \text{(B.20)} \\ &= \left(\mathsf{B}_{SX} - \mathsf{R}^{-1} \mathsf{B}_X\right) \mathsf{G}_X && \text{(B.21)} \\ &= \mathsf{R}^{-1} |1\rangle\langle \mathsf{b}_{SX}| \mathsf{G}_X && \text{(B.22)} \end{aligned}$$

which leads to

$$\frac{\tau \tau_{SX}}{\tau_S \tau_X} = 1 - \mu q_S r_X \tag{B.23}$$

and

$$0 = \mu \sigma_S \rho_X - \tau_S \tau_X + \tau \tau_{SX}. \tag{B.24}$$

This proves the fact that our solutions satisfy (3.7).

Considering the $\mathbb{T}_Y$-equations, we do not present here the calculations similar to ones discussed above, leaving the verification of (3.8) and (3.9) to the reader.